



# Phase-apodized-pupil Lyot Coronagraphs for Arbitrary Telescope Pupils

Emiel H. Por 

Leiden Observatory, Leiden University, P.O. Box 9513, 2300 RA Leiden, The Netherlands; [por@strw.leidenuniv.nl](mailto:por@strw.leidenuniv.nl)

Received 2019 June 24; revised 2019 August 2; accepted 2019 August 3; published 2020 January 16

## Abstract

The phase-apodized-pupil Lyot coronagraph (PAPLC) is a pairing of the apodized-pupil Lyot coronagraph and the apodizing phase plate (APP) coronagraph. We describe a numerical optimization method to obtain globally optimal solutions for the phase apodizers for arbitrary telescope pupils, based on the linear map between complex-amplitude transmission of the apodizer and the electric field in the post-coronagraphic focal plane. PAPLCs with annular focal-plane masks and point-symmetric dark zones perform analogous to their corresponding APLCs. However, with a knife-edge focal-plane mask and one-sided dark zones, the PAPLC yields inner working angles as close as  $1.4\lambda/D$  at contrasts of  $10^{-10}$  and a maximum post-coronagraphic throughput of  $>75\%$  for telescope apertures with central obscurations of up to 30%. We present knife-edge PAPLC designs optimized for the VLT/SPHERE instrument and the LUVOIR-A aperture. These designs show that the knife-edge PAPLC retains its performance, even for realistic telescope pupils with struts, segments, and non-circular outer edges.

*Key words:* instrumentation: high angular resolution – methods: numerical – techniques: high angular resolution

## 1. Introduction

In the last few decades, we have seen tremendous advances in the field of exoplanets. Initiated by the discovery of the first planet orbiting another main-sequence star by Mayor & Queloz (1995), we now know that most stars harbor a companion in the habitable zone (Borucki et al. 2011). The majority of planets are detected using indirect methods, such as radial velocity (Mayor & Queloz 1995) and transits (Charbonneau et al. 2000; Henry et al. 2000). For the brightest stars with transiting planets, spectral characterization is possible during the transit itself. Longer-period planetary transits require precise ephemerides and are limited by the decreasing frequency of observed transits. Direct imaging of these planetary systems provides a way for the detection and characterization of the atmospheres, including variability induced by the rotational modulation of cloud and weather systems and the discovery of liquid water surfaces through glints off liquid surface detectable with polarization.

With the advent of extreme adaptive optics systems, such as VLT/SPHERE (Beuzit et al. 2019), Gemini/GPI (Macintosh et al. 2008), Clay/MagAO-X (Close et al. 2012; Males et al. 2014), and Subaru/SCEXAO (Jovanovic et al. 2015), and dedicated space-based instrumentation, such as *WFIRST*/CGI (Spergel et al. 2013) and HabEx (Mennesson et al. 2016), spatially resolved imaging of exoplanets has started to become a reality. An optical system known as a coronagraph filters out the light from the on-axis star, while letting through the light from off-axis sources, such as that from faint companions or debris disks. This permits analysis of the off-axis light directly, without being overwhelmed by the on-axis star, and therefore easier chemical characterization of the material orbiting the star. Coronagraphs are both currently used and planned for both future and current space- and ground-based systems.

Many families of coronagraphs have been developed over the years. Among the simplest are the pupil-plane coronagraphs. These coronagraphs apodize the light only in a single pupil plane. The pattern of apodization is designed in such a way as to generate a dark region in the focal plane. Note that, as both on- and off-axis light is apodized in the same way, the

apodization pattern must be as minor as possible as to not block too much of the light from the companion or disk. Generally, during the design process of such a coronagraph, the throughput is maximized while simultaneously constraining the stellar intensity in the dark zone. Pupil-plane coronagraphs can be separated into two types:

1. *Shaped pupil coronagraphs (SPC)*. These coronagraphs apodize the pupil with a binary amplitude pattern. Amplitude apodization initially started off as grayscale (Slepian 1965), but has since changed to binary (Kasdin et al. 2003), as Carlotti et al. (2011) showed that convex optimization of a grayscale apodizer yields a globally optimal binary amplitude mask. SPCs can only create dark zones with point symmetry: as the Fourier transform of a real function is Hermitian, any amplitude-apodized pupil, either binary or grayscale, inherently has a point-symmetric point-spread function (PSF).
2. *Apodizing phase plate coronagraphs (APP)*. These coronagraphs apodize the pupil with a phase-only mask (Codona et al. 2006; Snik et al. 2012; Otten et al. 2017). Early designs used Fourier iteration techniques (Codona et al. 2006) to find a valid phase pattern. Currently, globally optimal phase patterns can be found using direct convex optimization (Por 2017). APPs can create dark zones with or without point symmetry.

While it may seem that combining both phase and amplitude apodizing in a pupil-plane coronagraph might yield coronagraphs with higher throughput than either SPCs and APPs, this is not the case. Por (2017) showed that global optimization of a complex-amplitude pupil-plane apodizer will always yield a phase-only apodizer. A corollary is that an APP coronagraph will always outperform an SPC, barring implementation details, as the solution space for SPCs is a subset of the solution space for pupil-plane coronagraphs with a complex-amplitude apodizer. That is, for a fixed telescope pupil shape, dark-zone geometry, and contrast requirement, the optimal APP will have the same or a higher throughput compared to the optimal SPC. In practice, however, for point-symmetric dark zones the gain in throughput is usually

minimal, except when the design requirements are so demanding that the throughput is already low for both the SPC and APP coronagraphs (Por 2017).

The sheer simplicity of the optical layout of pupil-plane coronagraphs has led to their widespread use in high-contrast imaging instruments (Doelman et al. 2017; Otten et al. 2017; Currie et al. 2018). However, this simple optical layout also implies worse performance compared to coronagraphs with a more complicated optical layout, due to their more limited design freedom. Because of this, the SPC is often combined with a Lyot stage downstream of the apodizer (Soumerai 2004; Zimmerman et al. 2016). A Lyot stage consists of a focal-plane mask, which apodizes part of the point-spread function, and a pupil-plane mask, called a Lyot-stop mask, that further filters out the residual stellar light. An SPC combined with a Lyot stage is called an apodized-pupil lyot coronagraph (APLC). The added Lyot stage has the effect of reducing the inner working angle and allowing deeper design contrasts. The APLC is able to achieve space-based contrasts at reasonable inner working angles and throughput, making it a baseline coronagraph to which other, more complicated coronagraph designs are compared (Pueyo et al. 2017; Riggs et al. 2017).


The success of the APLC leads us to the following question: what is the performance of a phase-apodized-pupil Lyot coronagraph (PAPLC)? In Section 2 we will outline the numerical optimization method for designing a PAPLC. We will distinguish two types of PAPLCs: one with an annular focal-plane mask and point-symmetric dark zones, and one with a knife-edge focal-plane mask and one-sided dark zones. We will perform a study for the parameter space for simplified telescope pupils for each type in Sections 3 and 4, respectively. To demonstrate the PAPLC for realistic telescope pupils we show designs for the VLT/SPHERE instrument and LUVUOIR-A telescope in Section 5. Finally, we will conclude with Section 6.

## 2. Overview of the Numerical Optimization Problem

In this section we will outline the optimization procedure for PAPLCs. This procedure is based on convex optimization and modifies that of Por (2017), where convex optimization is used for optimizing APPs. We will start by formally defining the optimization problem. Then we will convexify this problem to make global optimization more efficient. Furthermore, we will study how symmetries can be included in the optimization and how these affect the optimal phase pattern. Finally, we discuss how to constrain the tip-tilt of the apodizer in a way that keeps the optimization problem convex.

### 2.1. Problem Definition

The optical layout of the PAPLC is shown schematically in Figure 1. While joint optimization of the focal-plane mask and Lyot stop is in principle possible, we will restrict ourselves in this study to parameterized focal-plane masks and Lyot stops only. Their parameters will be viewed as hyperparameters on the optimization problem for finding the optimal apodizer. In this study, the number of hyperparameters is limited, and brute-force optimization is used to optimize them at an acceptable performance cost. More advanced black-box global optimizers, such as Bayesian optimization approaches (Kushner 1964; Snoek et al. 2012) or Monte-Carlo techniques (Fogarty et al. 2018), can be used if more hyperparameters are required.

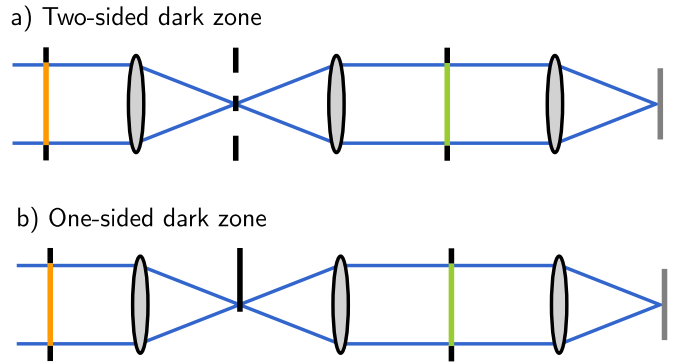

**Figure 1.** Optical layout of the PAPLC with (a) point-symmetric dark zones, and (b) one-sided dark zones follows a standard Lyot-style optical setup. The focal-plane mask for point-symmetric dark zones is annular, while it is a knife-edge for the one-sided dark zone. In this study we optimize the pre-apodizer (in orange), viewing the parameters of the focal-plane mask and the Lyot stop (in green) as hyperparameters.

Additionally, while many types of focal-plane mask designs are possible, we restrict ourselves in this study to either annular focal-plane masks for point-symmetric dark zones, or an offset knife-edge focal-plane mask for one-sided dark zones. For our parameter studies in Sections 3 and 4 we will use simplified apertures. There we will use a circularly obscured telescope pupil and an annular Lyot stop. Furthermore, we will solely use annular dark zones for the point-symmetric dark zones, and D-shaped dark zones as one-sided dark zones. All parameters for the telescope pupil, focal-plane mask, Lyot stop, and dark-zone geometry are shown schematically in Figure 2.

We will use aperture photometry as the main metric for coronagraph performance, and follow Ruane et al. (2018) for our definitions. Here we give a short summary of these definitions for completeness.

We define  $\eta_0$  as the encircled energy within a circle with a radius of  $0.7\lambda/D$  of a normalized PSF generated by the optical system without any coronagraphic masks, so with no apodizer mask, focal-plane mask, or Lyot-stop mask. This PSF is normalized such that the total power equals one. We define  $\eta_p(\mathbf{k}, \lambda)$  as the encircled energy within a circle with a radius of  $0.7\lambda/D$  centered around  $\mathbf{k}$ , of the planetary, off-axis PSF, where the planet is located at  $\mathbf{k}$ , through the coronagraphic optical system. We define  $\eta_s(\mathbf{k}, \lambda)$  as the encircled energy within a circle with a radius of  $0.7\lambda/D$  centered around  $\mathbf{k}$ , of the stellar, on-axis image through the coronagraphic optical system. We can now define the throughput  $T(\mathbf{k}, \lambda)$  as the ratio between encircled energies of the non-coronagraphic PSF and the off-axis coronagraphic PSF:


$$T(\mathbf{k}, \lambda) = \eta_p(\mathbf{k}, \lambda) / \eta_0. \quad (1)$$

The raw contrast  $C(\mathbf{k}, \lambda)$  is defined as the ratio between stellar and planetary encircled energies:

$$C(\mathbf{k}, \lambda) = \eta_s(\mathbf{k}, \lambda) / \eta_p(\mathbf{k}, \lambda). \quad (2)$$

The design raw contrast  $C_{\text{design}}$  is defined as the maximum raw contrast in the dark zone  $D$  over the whole spectral band:

$$C_{\text{design}} = \max_{\mathbf{k} \in D, \lambda \in [\lambda_-, \lambda_+]} C(\mathbf{k}), \quad (3)$$

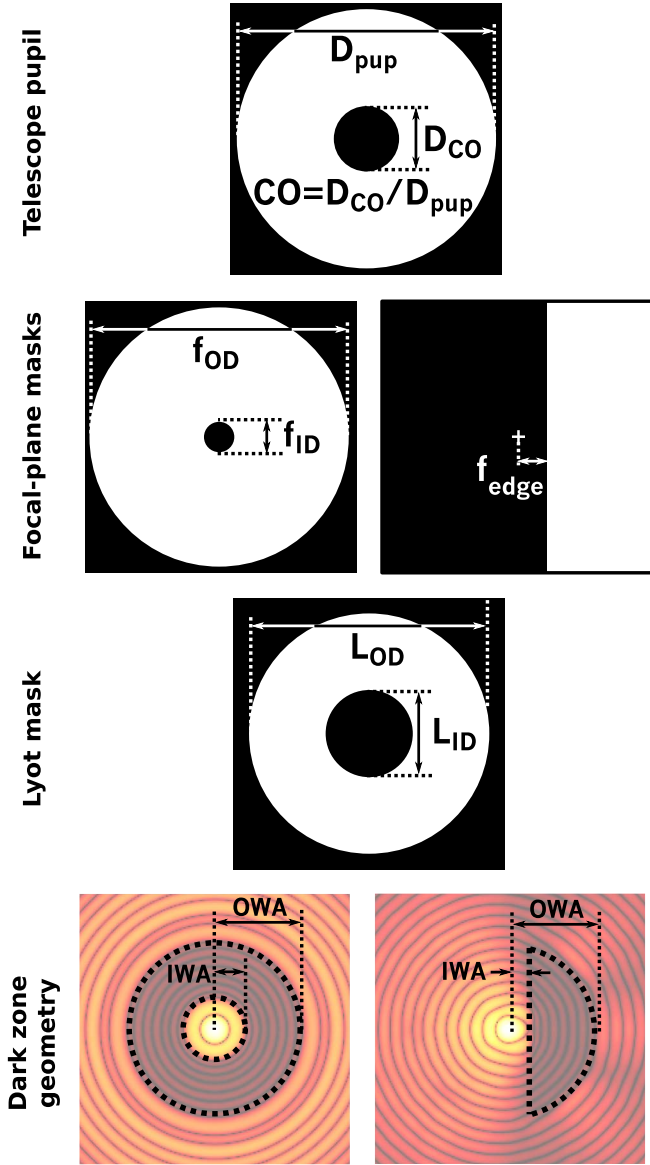

**Figure 2.** Definition of all masks used in this work. These masks are used for the parameter study in Sections 3 and 4. Centered masks are used for both point-symmetric and one-sided dark zones. The left-justified masks are for two-sided dark zones, while the right-justified masks are used for one-sided dark zones. In general though, arbitrary telescope pupils, Lyot masks, focal-plane masks, and dark-zone geometries can be used with a PAPLC.

where  $\lambda_-$ ,  $\lambda_+$  are the minimum and maximum wavelengths in the spectral band. Finally, we define the inner working angle IWA as the smallest angular separation for which the throughput is larger than half of its maximum value for the whole spectral band:

$$\text{IWA} = \min_{\{k: T(k, \lambda) > \frac{1}{2} \max_k T(k, \lambda)\}, \lambda \in [\lambda_-, \lambda_+]} |k|. \quad (4)$$

We can now define the optimization problem for the PAPLC. We try to maximize the throughput of the planet while simultaneously constraining the raw contrast in the dark zone. The phase pattern  $\phi(\mathbf{x})$  can vary across the aperture. As the throughput  $T(\mathbf{k}, \lambda)$  varies across the field of view and as function of wavelength across the spectral band, we take the maximum attained throughput at the center wavelength  $\lambda_0$  as a

measure for the overall throughput. The optimization problem is given by

$$\text{maximize}_{\phi(\mathbf{x})} \max_{\mathbf{k}} T(\mathbf{k}, \lambda_0) \quad (5a)$$

$$\text{subject to } \eta_s(\mathbf{k}, \lambda) < \eta_p(\mathbf{k}, \lambda) \cdot 10^{-c(\mathbf{k})} \\ \forall \mathbf{k} \in D \forall \lambda \in [\lambda_-, \lambda_+], \quad (5b)$$

where  $10^{-c(\mathbf{k})}$  is the design contrast in the dark zone,  $\mathbf{x}$  is a position in the pre-apodizer,  $\mathbf{k}$  is a position in the post-coronagraphic focal plane,  $D$  is the dark zone,  $\lambda$  is the wavelength of the light, and  $[\lambda_-, \lambda_+]$  is the spectral bandwidth for which we want to optimize.

## 2.2. Simplification and Convexification

This optimization problem is non-convex. This means that there could be many local optima and ensuring that the found solution is globally optimal requires a full search of the parameter space. We often prefer convex optimization problems, as they only permit only a single local optimum (which is then also globally optimal). This makes solving convex optimization problems much easier than non-convex problems. In order to convexify our non-convex optimization problem, we need to simplify it quite a bit.

We will discard the aperture photometry methodology in the optimization procedure. This will help us to convexify the objective function later on and will simplify the notation. We will still evaluate all designs using aperture photometry. This yields, for the optimization problem,

$$\text{maximize}_{\phi(\mathbf{x})} |E_{\text{noncoro}, \lambda_0}(0)|^2 \quad (6a)$$

$$\text{subject to } |E_{\text{coro}, \lambda}(\mathbf{k})|^2 < 10^{-c(\mathbf{k})} |E_{\text{noncoro}, \lambda}(\mathbf{k})|^2 \\ \forall \mathbf{k} \in D \forall \lambda \in [\lambda_-, \lambda_+], \quad (6b)$$

where  $E_{\text{coro}, \lambda}(\mathbf{k})$  is the on-axis PSF at wavelength  $\lambda$  and  $E_{\text{noncoro}, \lambda}(\mathbf{k})$  is the on-axis PSF without the focal-plane mask but with the apodizer and Lyot-stop mask in the optical system:

$$E_{\text{coro}, \lambda}(\mathbf{k}) = \mathcal{P}_\lambda \{ L(\mathbf{x}) \mathcal{P}_\lambda^{-1} \{ M(\mathbf{k}) \mathcal{P}_\lambda \{ E_{\text{pup}}(\mathbf{x}) \} \} \}, \quad (7a)$$

$$E_{\text{noncoro}, \lambda}(\mathbf{k}) = \mathcal{P}_\lambda \{ L(\mathbf{x}) E_{\text{pup}}(\mathbf{x}) \}, \quad (7b)$$

$$E_{\text{pup}}(\mathbf{x}) = A(\mathbf{x}) \exp i\phi(\mathbf{x}), \quad (7c)$$

where  $A(\mathbf{x})$  is the telescope pupil,  $M(\mathbf{k})$  is the focal-plane mask,  $L(\mathbf{x})$  is the Lyot stop,  $\mathcal{P}_\lambda\{\cdot\}$  is the propagation operator that propagates an electric field from a pupil plane to a focal plane given a wavelength of  $\lambda$  and  $\mathcal{P}_\lambda^{-1}\{\cdot\}$  is the inverse of this operator, propagating an electric field from a focal plane to a pupil plane.

This simplification makes the optimization more tractable, but not yet convex. We change the complex phase exponential  $\exp i\phi(\mathbf{x})$  into the complex amplitude  $X(\mathbf{x}) + iY(\mathbf{x})$ , so that


$$E_{\text{pup}}(\mathbf{x}) = A(\mathbf{x})(X(\mathbf{x}) + iY(\mathbf{x})), \quad (8)$$

and add the phase-only constraint

$$X^2(\mathbf{x}) + Y^2(\mathbf{x}) = 1 \quad (9)$$

to the optimization problem. This additional constraint requires the amplitude of the now complex-amplitude apodizer transmission to be one.

Furthermore, we can remove the piston symmetry from the optimization problem: the problem is invariant under the

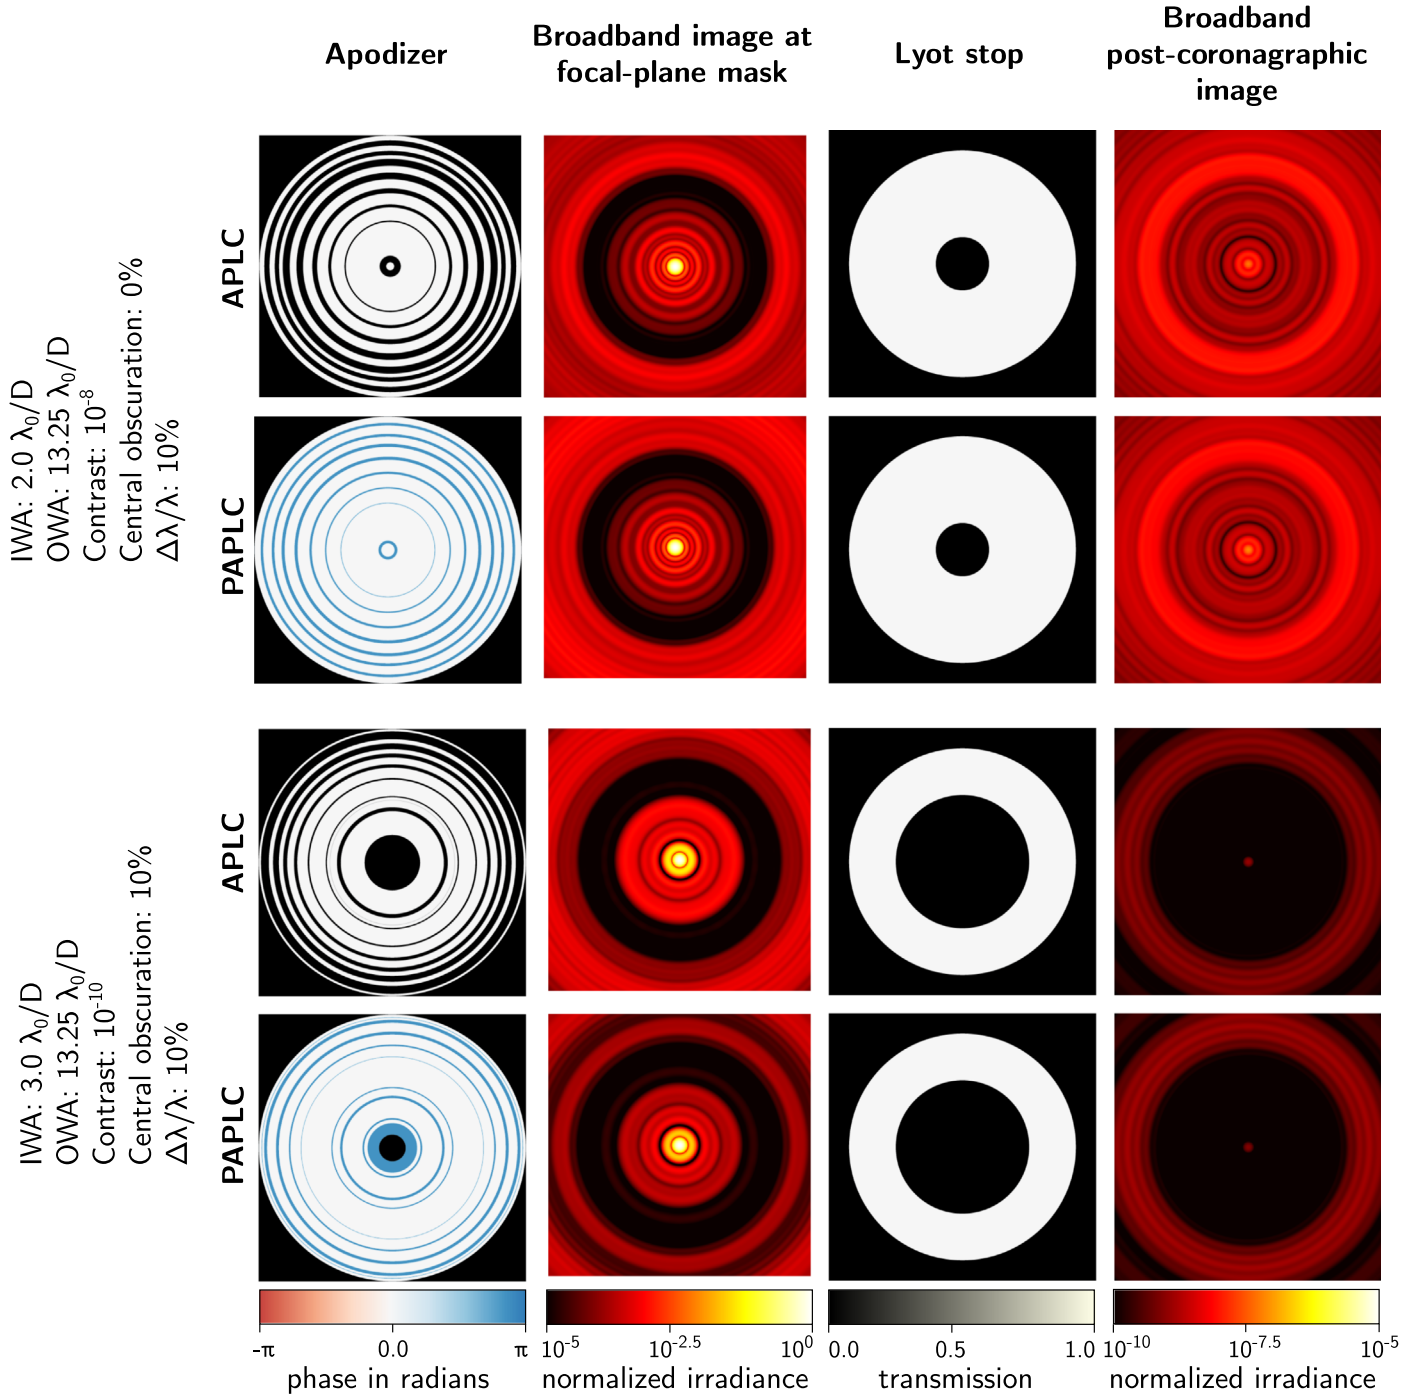


**Figure 3.** Some examples of PAPLC designs with point-symmetric dark zones. For two sets of parameters, we show both the APPLC design and the PAPLC design. The phase patterns for the PAPLC consist of regions of 0 or  $\pi$  radians in phase, while the APPLC designs consist of regions of 0 and 1 transmission. We show a 10% broadband image just in front of the focal-plane mask in log scale from  $10^{-5}$  to  $10^0$ , and the post-coronagraphic image in log scale from  $10^{-10}$  to  $10^{-5}$ . The Lyot-stop and focal-plane mask are optimized as hyperparameters.

transformation  $S: \phi(\mathbf{x}) \rightarrow \phi(\mathbf{x}) + \alpha$ , where  $\alpha$  is any arbitrary constant. So when we have found a solution  $\hat{\phi}(\mathbf{x})$ , we know that  $S\hat{\phi}(\mathbf{x}) = \hat{\phi}(\mathbf{x}) + \alpha$  is also a solution of the problem. This means that the solution to the problem is non-unique and the problem therefore non-convex. We remove this symmetry by maximizing the real part of the non-coronagraphic electric field, rather than its absolute value. The choice of maximizing the real part, instead of any other linear combination of real and imaginary part is arbitrary. The removal of this symmetry alone

does not guarantee a unique solution in general; it only removes a source of non-convexity from the problem. The optimization problem now reads

$$\underset{X(x), Y(x)}{\text{maximize}} \quad \Re\{E_{\text{noncoro}, \lambda_0}(0)\} \quad (10a)$$

$$\begin{aligned} \text{subject to} \quad & |E_{\text{coro}, \lambda}(\mathbf{k})|^2 < 10^{-c(k)} |E_{\text{noncoro}, \lambda}(\mathbf{k})|^2 \\ & \forall \mathbf{k} \in D \quad \forall \lambda \in [\lambda_-, \lambda_+] \end{aligned} \quad (10b)$$

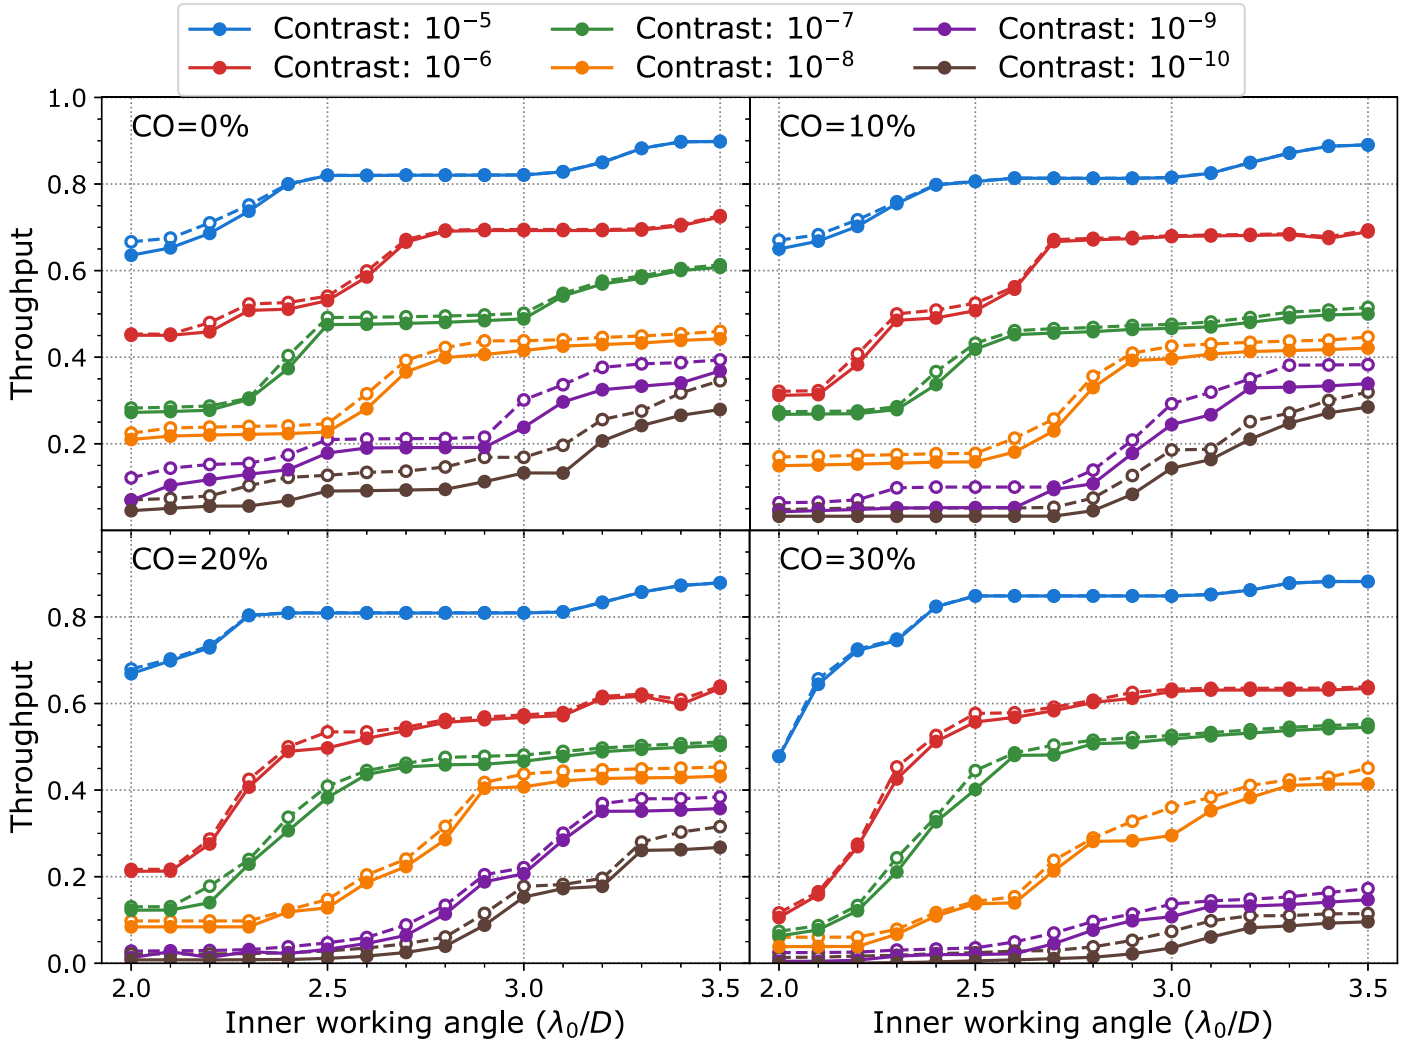

**Figure 4.** Throughput vs. inner working angle for various contrasts for an annular dark zone. The solid lines and solid points are APLC designs, and the dashed lines and open points are PAPLC designs. The design contrast ranges from  $10^{-5}$  to  $10^{-10}$ . Each point is a coronagraph design for which all hyperparameters (focal-plane mask size, and Lyot-stop inner and outer diameters) have been optimized.

$$X^2(\mathbf{x}) + Y^2(\mathbf{x}) = 1 \forall \mathbf{x}. \quad (10c)$$

At this point the objective function is fully linear and therefore convex, and the first constraint is quadratic but convex as well. The only remaining source of non-convexity stems from the phase-only constraint on the complex-amplitude apodizer transmission. Similar to Por (2017) we allow the apodizer to vary not only in phase, but also in amplitude. This convexifies the last constraint and yields the following convex optimization problem:

$$\underset{X(\mathbf{x}), Y(\mathbf{x})}{\text{maximize}} \quad \Re\{E_{\text{noncoro}, \lambda_0}(0)\} \quad (11a)$$

$$\text{subject to} \quad |E_{\text{coro}, \lambda}(\mathbf{k})|^2 < 10^{-c(\mathbf{k})} |E_{\text{noncoro}, \lambda}(\mathbf{k})|^2 \\ \forall \mathbf{k} \in D \forall \lambda \in [\lambda_-, \lambda_+] \quad (11b)$$

$$X^2(\mathbf{x}) + Y^2(\mathbf{x}) \leq 1 \forall \mathbf{x}. \quad (11c)$$


This problem can easily be solved using standard large-scale optimization algorithms, such as those implemented in Gurobi (Gurobi Optimization 2016). This convexified problem does not guarantee a phase-only solution, but we will see that in practice all solutions turn out to be phase-only. Furthermore, similar to SPCs and APPs as mentioned above, the solutions

space for APLCs is a subspace of this complex-amplitude apodizer optimization. As the latter produces PAPLCs in practice, a PAPLC will always perform the same or better than an APLC for a given telescope pupil, dark-zone geometry, and design contrast.

### 2.3. Symmetry Considerations

In general symmetric optimization problems are guaranteed to yield symmetric globally optimal solutions if the optimization problem has multiple solutions (Waterhouse 1983). Applying the symmetry transformation to one globally optimal solution can yield a different, but also globally optimal solution. In our case, the final optimization problem is convex, and as such has only a single, unique solution, so any symmetry in the optimization problem must also be satisfied by the unique solution.

Making use of these symmetries can significantly reduce the computational complexity of the optimization. For example, for a point-symmetric focal-plane mask  $M(\mathbf{k}) = M(-\mathbf{k})$  and a point-symmetric dark zone ( $-\mathbf{x} \in D \forall \mathbf{x} \in D$ ), the transformation  $Y(\mathbf{x}) \rightarrow -Y(\mathbf{x})$  is a symmetry of the problem. Therefore  $Y(\mathbf{x}) = -Y(\mathbf{x}) = 0 \forall \mathbf{x}$  and the complex transmission

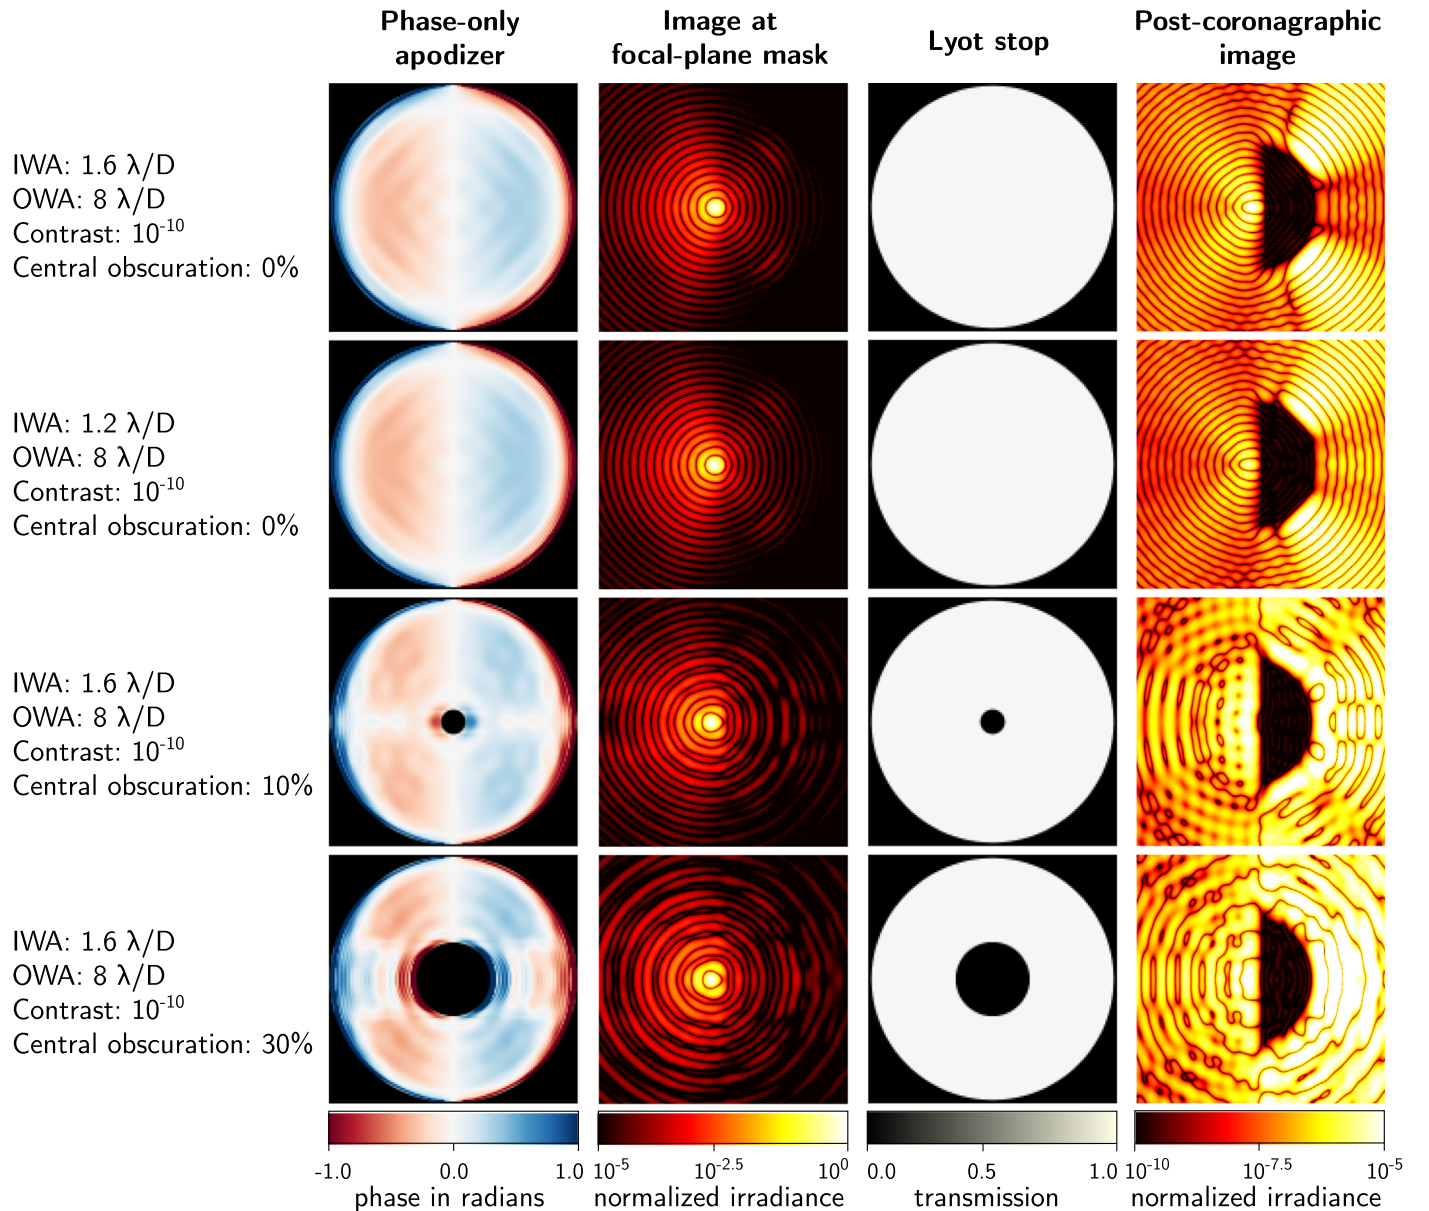


**Figure 5.** Some examples of PAPLC designs with one-sided dark zones. The color scale for phase is from  $-1$  rad to  $1$  rad but typically the phase pattern rms is  $\sim 0.4$  rad. We show the image at the focal-plane mask with a translucent focal-plane mask to show the positioning of the focal-plane mask relative to the peak of the PSF. In the coronagraph the focal-plane mask is completely opaque. The image at the focal-plane mask is in log scale from  $10^{-5}$  to  $10^0$ . The post-coronagraphic is also in log scale from  $10^{-10}$  to  $10^{-5}$ . The focal-plane mask offset, and Lyot-stop inner and outer diameters were optimized to maximize post-coronagraphic throughput.

of the apodizer is real-valued. The optimization problem is now significantly simplified. The only remaining nonlinear (in this case quadratic) constraint in Equation 11(c) can be replaced by two linear constraints. This yields a linear program, which is extremely easy to solve, even for a large number of variables.

Another interesting example is that of circular symmetry. If the telescope aperture, focal-plane mask, Lyot stop, and dark zone are circularly symmetric, then the apodizer must consist of rings and must be completely real-valued (as circular symmetry implies point symmetry). This yields in practice an apodizer consisting of rings of zero and  $\pi$  phase. This simplification significantly reduces the dimensionality of the solution space, thereby substantially reducing the computational complexity, which enables more extensive parameter studies, as shown in Section 3.

#### 2.4. Tip-tilt Correction for One-sided Dark Zones

For one-sided dark zones, the contrast is constrained only on one side of the PSF. In this case the optimizer tends to add a small tilt on the phase solution. The reason for this is that the optimizer maximizes the real part of the non-coronagraphic PSF at the optical axis, not at its peak. This seemingly tiny difference allows the optimizer to shift the peak of the non-coronagraphic PSF slightly in cases where the decrease in flux at the optical axis due to the shifted PSF is compensated by the increase in coronagraph throughput due to a less aggressive phase plate design. This centroid shift is unwanted, as it effectively increases the inner working angle of the coronagraph. This effect is particularly prevalent for aggressive designs with small inner working angles, as a lot of throughput can be gained from shifting the PSF by a small amount. In

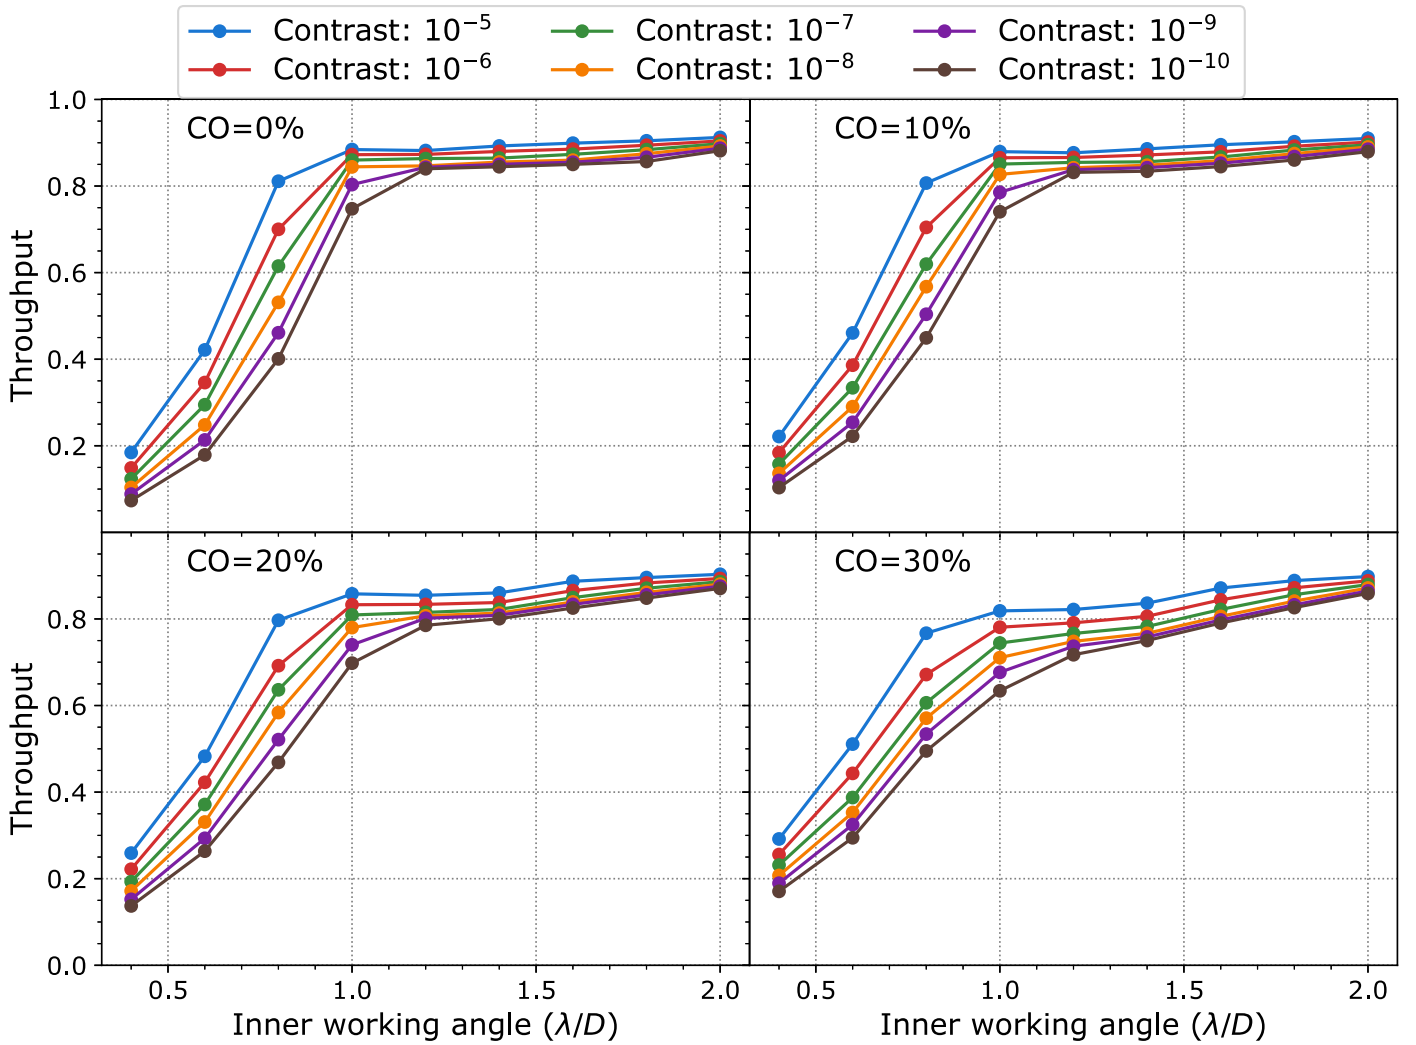

**Figure 6.** Throughput vs. inner working angle for various contrasts for a one-sided dark zone. All designs are PAPLC designs. The design contrast ranges from  $10^{-5}$  to  $10^{-10}$ . Each point is a coronagraph design for which all hyperparameters (focal-plane mask offset, and Lyot-stop inner and outer diameters) have been optimized. Each of the example designs in Figure 5 corresponds to a point in this figure.

these cases, the optimizer will produce a design with a larger inner working angle than what was asked.

The same effect is also commonly seen when optimizing one-sided APPs (Por 2017), and we deal with it here in the same way. We constrain the intensity of the non-coronagraphic PSF to be smaller or equal to the intensity at the center of the non-coronagraphic PSF. This ensures that the maximum of the non-coronagraphic PSF is always attained at the optical axis, so that any movement of the centroid of the planet is not allowed. Mathematically, this constraint is expressed as

$$|E_{\text{noncoro}, \lambda_0}(\mathbf{k})|^2 \leq |E_{\text{noncoro}, \lambda_0}(0)|^2 \forall \mathbf{k}. \quad (12)$$

This constraint is convex, and does therefore not affect the convexity of the optimization problem. Despite this, the resulting optimization problem is in practice extremely slow to solve, due to the quadratic nature of the added constraint. Adopting a linearized version of this constraint, akin to Por (2017), yields an order-of-magnitude improvement in runtime. A complete version of the optimization problem can be found in the Appendix, including all approximations and modifications necessary to create an efficient numerical optimization problem.

### 3. Parameter Study for Point-symmetric Dark Zones

First we discuss point-symmetric dark zones. As this case is extremely similar to that of APLCs, we compare the PAPLC directly to the equivalent APLC. These APLCs are obtained using a similar optimization procedure. This can be derived starting from Equation (11), setting  $Y(\mathbf{x}) = 0$  and additionally constraining  $X(\mathbf{x} \geq 0)$ . This optimization problem for APLCs is equivalent to that used by Zimmerman et al. (2016).

To show the performance of a PAPLC, we use simplified telescope pupils. We use a circular telescope pupil with a circular central obscuration with a fractional size of  $\text{CO} = D_{\text{CO}}/D_{\text{tel}}$ . We use an annular Lyot mask parameterized by an inner and outer diameter,  $L_{\text{ID}}$  and  $L_{\text{OD}}$ , respectively. These masks are shown schematically in Figure 2. We will use an annular focal-plane mask, parameterized by an inner and outer diameter,  $f_{\text{ID}}$  and  $f_{\text{OD}}$ , respectively. The dark zone is also annular, parameterized by an inner and outer radius  $\text{DZ}_{\text{min}} \geq f_{\text{ID}}/2$  and  $\text{DZ}_{\text{max}} \leq f_{\text{OD}}/2$ . These masks are shown schematically in Figure 2.

In Figure 3 we show some example PAPLCs along with equivalent APLC designs. Overall, we can see that the ring structure in the PAPLCs is very similar to that of the APLCs. The rings are smaller by about a factor of two, which is to be

expected as the apodization in phase has twice the effect of a zero transmission ring; however, the rings are at the same position.

We perform a full parameter study on the PAPLC and compare it to the similar APLC parameter study. We let the dark-zone inner diameter change from  $DZ_{\min} = 2.0\lambda_0/D$  to  $DZ_{\min} = 3.5\lambda_0/D$ , and fix the dark-zone outer diameter at  $DZ_{\max} = 13.25\lambda_0/D$ . We vary the focal-plane mask inner diameter from  $f_{ID} = 2DZ_{\min} - 5\lambda_0/D$  to  $f_{ID} = 2DZ_{\min}$ . The focal-plane mask outer diameter is fixed at  $f_{OD} = 2DZ_{\max}$ , as it was found to have no influence on the throughput of both the PAPLC and the APLC. We vary the Lyot-mask inner diameter from  $L_{ID} = CO$  to  $L_{ID} = CO + 0.4$ , and the outer diameter from  $L_{OD} = 0.85$  to  $L_{OD} = 1$ . The relative spectral bandwidth was 10%. We performed the parameter study for design contrasts from  $10^{-5}$  to  $10^{-10}$  with central obscuration ratios varying from 0% to 30%, to represent a full range of potential ground-based and space-based instrument parameters.

In Figure 4 we show the maximum throughput for a combination of dark-zone inner diameter, central obscuration ratio and design contrast, where all other hyperparameters have been optimized out using the brute-force optimization procedure in Section 2.1. APLCs are denoted by filled points and solid lines, while the PAPLC has open points and dashed lines. It is clear that PAPLCs for point-symmetric dark zones do not hold a big advantage over APLCs. Only when throughput is already compromised can the PAPLC gain a significant advantage, at most  $\sim 50\%$  in this parameter space.


Also clear is the plateau behavior of the throughput: at some points the throughput can be almost insensitive to dark-zone inner diameter, while at other points the throughput can drop rapidly for even a small change in dark-zone inner diameter. This drop in throughput occurs every  $0.5\text{--}1\lambda_0/D$ . The drops change their center position as function of central obscuration ratio and contrast, and can sometimes merge. This behavior is similar to that of APPs and shaped pupils with annular dark zones Por (2017).

In conclusion, the PAPLC is marginally better than the APLC, but the difference between them is extremely minor, easily overshadowed by the ease of manufacturing of binary amplitude masks. Only where the throughput is low does the PAPLC offer a large relative, but small absolute, performance gain.

#### 4. Parameter Study for One-sided Dark Zones

As phase-only apodizers can bring about one-sided dark zones, it is interesting to look at a Lyot-style coronagraph based on a one-sided dark zone. We use a focal-plane mask that blocks all the light on one side of the focal-plane. This mask is offset from the center of the PSF by  $f_{\text{edge}}$ . We again use an annular Lyot stop. The dark zone is D-shaped on the side of the PSF that is not blocked by the focal-plane mask. These masks are shown schematically in Figure 2.

The propagation through the focal-plane mask is performed using standard forward and backward FFTs on a zero-padded pupil. As the knife-edge is invariant across the  $y$ -axis, we can view all rows of the pupil as independent and avoid performing an FFT across the  $y$ -axis, as well as all FFTs across the  $x$ -axis on the zero-padded rows. This makes for a much faster propagation and reduced memory usage. An implementation of this method is available in the open-source package HCIPy (Por et al. 2018).

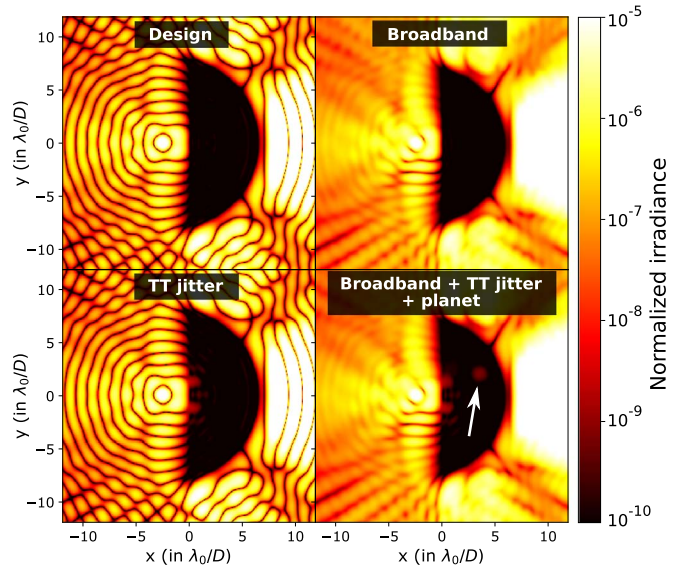

**Figure 7.** Raw post-coronagraphic images for a one-sided dark zone with an inner working angle of  $1.6\lambda_0/D$  with increasing imperfections. Top left: Only tip-tilt jitter with  $0.003\lambda_0/D$  rms. Top right: tip-tilt jitter and 20% broadband light. Bottom left: tip-tilt jitter, broadband light and  $0.5\lambda_0/D$  residual dispersion from the ADC. Bottom right: tip-tilt jitter, broadband light, residual dispersion and a planet, indicated with an arrow, with a raw contrast of  $10^{-9}$  relative to the host star.


We show some examples in Figure 5. We can see that the phase apodizer acts as an APP, in that it creates a one-sided dark zone with a deepening raw contrast as a function of angular separation. At no point, however, does the stellar PSF at the focal-plane mask reach the required design contrast. The design raw contrast is produced by the focal-plane mask and the Lyot-stop mask, deepening the contrast by more than three decades.

##### 4.1. Contrast, Inner Working Angle, and Central Obscuration Ratio

We perform a full parameter study on the PAPLC for one-sided dark zones. We let the dark-zone inner radius change from  $DZ_{\min} = 0.4\lambda_0/D$  to  $DZ_{\min} = 2.0\lambda_0/D$ , and fixed the outer radius at  $DZ_{\max} = 8\lambda_0/D$ , mainly limited by the computational runtime for the full parameter study. We varied the focal-plane mask offset from  $f_{\text{edge}} = DZ_{\min}$  to  $f_{\text{edge}} = DZ_{\min} - 1.0\lambda_0/D$ . The Lyot-mask parameters are varied in the same way as for the point-symmetric dark zone. All masks were calculated for a single wavelength only: we presume monochromatic light. We performed the parameter study for design contrasts from  $10^{-5}$  to  $10^{-10}$  with central obscuration ratios varying from 0% to 30%, to represent a full range of potential ground-based and space-based instrument requirements.

In Figure 6 we show the maximum throughput for a combination of dark-zone inner diameter, central obscuration ratio, and design contrast, where all other parameters have been optimized out. Shrinking the Lyot stop had no positive effects on the throughputs: having the Lyot stop be the same as the telescope pupil yielded the best throughput. Also clear is that for dark-zone inner radii of  $\gtrsim 1.2\lambda_0/D$  the throughput is relatively independent of design contrast. This is a useful property for coronagraphs destined for space-based instruments. We also see that throughput at a fixed dark-zone inner



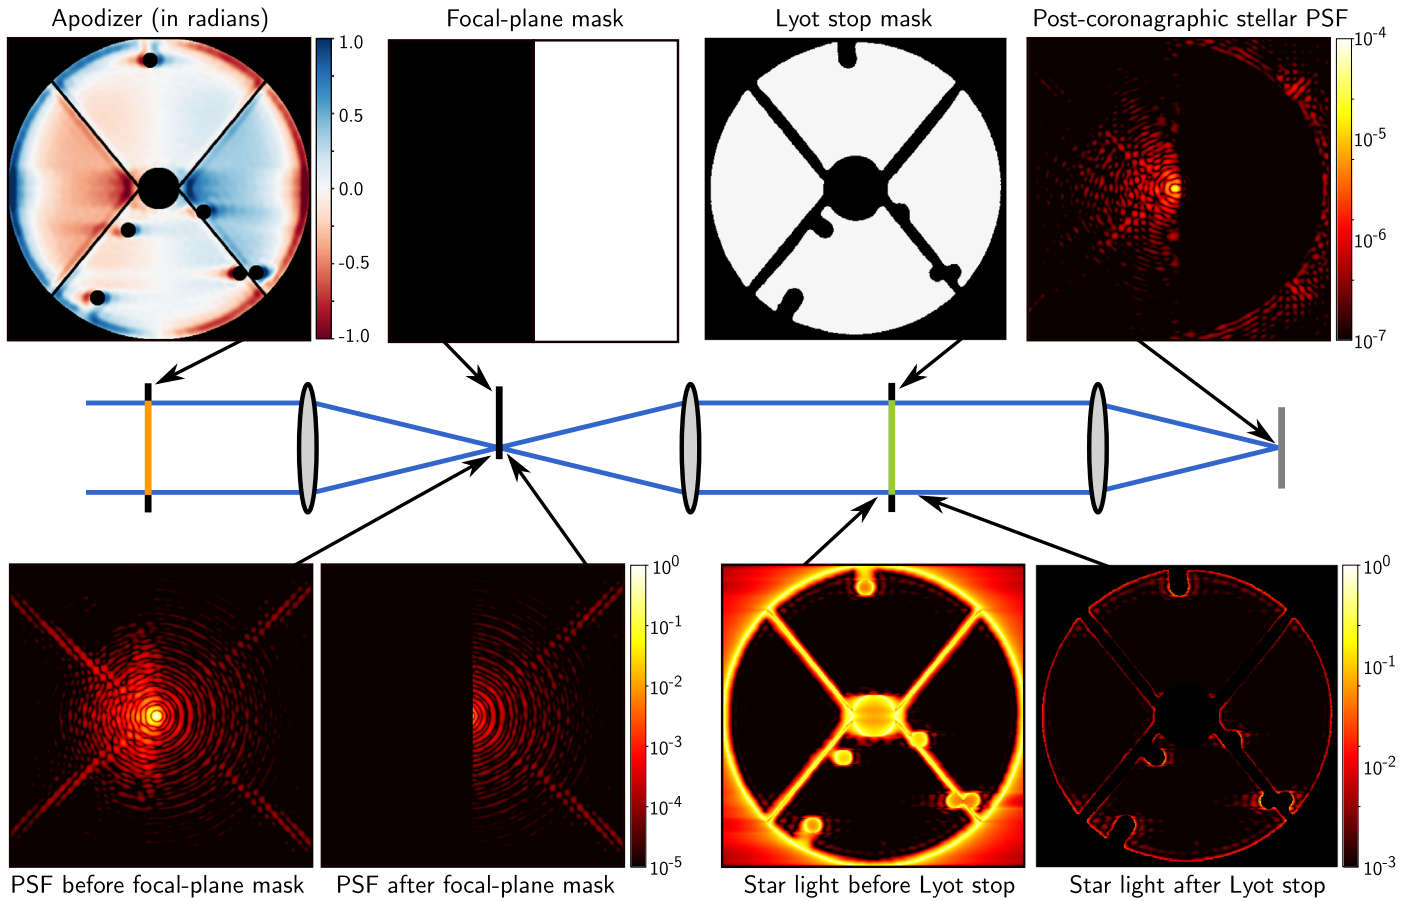

**Figure 8.** Case study design for VLT/SPHERE. We show the apodizer phase pattern, focal-plane mask, and Lyot stop. Additionally, we show the light in each of the coronagraphic planes: before and after the focal-plane mask (on a logarithmic scale), and before and after the Lyot stop (on a logarithmic scale, normalized to the peak intensity). Finally, the normalized irradiance of the post-coronagraphic stellar PSF is shown (on a logarithmic scale). Note that the peak in the post-coronagraphic stellar PSF is not the airy core, but rather a stellar leakage at a relative intensity of  $\sim 2 \times 10^{-4}$  that of the star PSF.

radius is relatively insensitive to central obscuration ratio of the telescope pupil.

#### 4.2. Achromatization and Residual Atmospheric Dispersion


We can produce an achromatic design from any monochromatic design by centering the focal-plane mask (i.e., using  $f_{\text{edge}} = 0$ ) and introducing a wavelength-dependent shift using a phase tilt at the phase-only apodizer. This phase tilt acts the same as the phase pattern, so we can simply modify the apodizer pattern by adding a tilt on it. In this way, as the PSF grows with wavelength, it will offset the PSF by the same amount, leaving the edge of the focal-plane mask in the same position relative to the rescaled PSF. This makes the one-sided PAPLC completely achromatic in theory (barring experimental effects). One possible downside to this practice is that the planetary PSF inherits this phase tilt, which acts as a grating smearing out its light across the detector. For small focal-plane mask offsets however, this effect can be quite small. For example, for a relative spectral bandwidth of  $\Delta\lambda/\lambda_0 = 20\%$ , and a focal-plane offset of  $f_{\text{edge}} = 1.6\lambda/D$ , the planet is smeared out across  $\Delta\lambda/\lambda_0 \cdot f_{\text{edge}} = 0.32\lambda_0/D$ , well within the size of the airy core of the planet. This smearing is independent of field position.

The focal-plane mask is translation-invariant in one direction. This means that any tip-tilt errors in that direction will have no influence on the coronagraphic performance other than

movement of the coronagraphic PSF. We will explore the tip-tilt sensitivity of the PAPLC further in Section 5.3. Here we focus on the application of this insensitivity for residual atmospheric dispersion for ground-based telescopes. As telescopes get larger, atmospheric dispersion will become stronger relative to the size of the airy core, making the performance of the atmospheric dispersion corrector even more critical for future large ground-based telescopes (Pathak et al. 2016).

As the PAPLC is insensitive to tip-tilt along one axis, we can align the residual atmospheric dispersion along the knife-edge. In this case, the atmospheric dispersion does not degrade the coronagraph performance, and we would only require  $\lesssim 1 \lambda_0/D$  of residual atmospheric dispersion, instead of less than a few tenths to hundredths of  $\lambda_0/D$  for other focal-plane coronagraphs. This significantly relaxes the constraints on the atmospheric dispersion correctors and simplifies their implementation and complexity. Of course, this is only possible on telescopes where the orientation of the pupil is fixed with respect to the zenith, which is the case for all alt-azimuth-mounted telescopes, the majority of current large telescopes.

In Figure 7 we show each of these effects for an example PAPLC design. We show the design PAPLC post-coronagraphic PSF, a post-coronagraphic PSF with (isotropic) tip-tilt jitter and a broadband light source, a post-coronagraphic PSF with broadband light and a  $0.5\lambda/D$  residual atmospheric dispersion pointed along the focal-plane mask edge, and finally

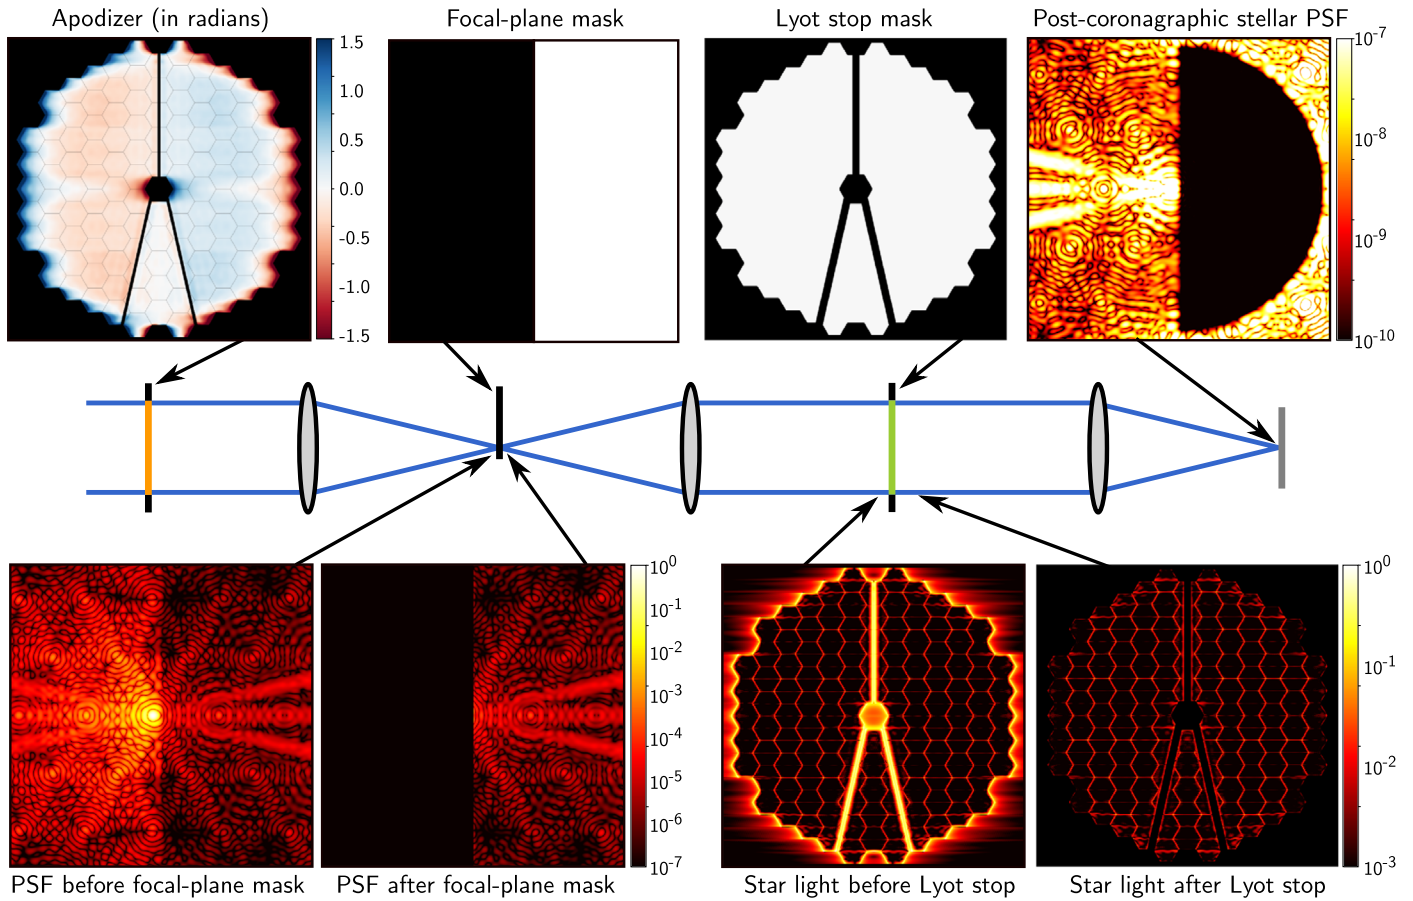

**Figure 9.** Case study design for the LUVOIR-A telescope. We show the apodizer phase pattern, focal-plane mask, and Lyot stop. Additionally, we show the light in each of the coronagraphic planes: before and after the focal-plane mask (on a logarithmic scale), and before and after the Lyot stop (on a logarithmic scale, normalized to the peak intensity). Finally, the normalized irradiance of the post-coronagraphic stellar PSF is shown (on a logarithmic scale). Note that the peak in the post-coronagraphic stellar PSF is not the airy core, but rather a stellar leakage at a relative intensity of  $\sim 2 \times 10^{-5}$  that of the star PSF.

a post-coronagraphic PSF with (isotropic) tip-tilt jitter, residual atmospheric dispersion, broadband light, and an injected planet.

## 5. Case Studies for VLT/SPHERE and LUVOIR-A

To show that the PAPLC can handle more complicated apertures as well, we present two case studies. The first is a design for VLT/SPHERE, showing that the design method can deal with a complex telescope pupil consisting of spiders and dead deformable mirror actuators. The second is a design for LUVOIR-A, showing that designs with space-based contrasts are possible, and showing that the PAPLC can handle the segmented telescope pupil with spiders and central obscuration seen in future large space telescopes.

### 5.1. VLT/SPHERE

As VLT/SPHERE is a ground-based instrument, it contains an AO system that will limit the raw contrast of resulting images to a level of  $\sim 10^{-4}$  to  $\sim 10^{-6}$ . We fix the design raw contrast at  $10^{-7}$  to avoid having the coronagraph limit the raw contrast of observations. The outer working angle was fixed at  $30\lambda/D$ . For the Lyot mask we used that of the existing ALC2 Lyot mask in VLT/SPHERE (Guerra et al. 2011) to simplify integration in the VLT/SPHERE instrument. We performed a small parameter study on the inner working angle, of which we

present here only one of the solutions. This solution has an inner working angle of  $1.4\lambda/D$  and a focal-plane mask offset of  $f_{\text{edge}} = 1.0\lambda/D$ . We show the phase solution, PSF on the focal-plane mask, intensity at the Lyot-stop and post-coronagraphic PSF in Figure 8.

The light at the positions of the dead actuators on the deformable mirror in VLT/SPHERE are blocked at the apodizer. This provides greater resilience against the unknown positions of the dead actuators. For traditional Lyot coronagraphs and also APLCs, dead deformable mirror actuators are usually blocked in the Lyot stop. This, however, requires a small blocking element in the focal-plane mask, as in this case the local perturbation caused by the dead deformable mirror actuator is kept local by the focal-plane mask making it possible to efficiently block its resulting speckles in the Lyot stop. In our case however, the focal-plane mask blocks over half of the field of view, making it necessary for the light impinging on dead actuators on the deformable mirror to be blocked upstream at the apodizer, as speckles caused by a dead actuator are now spread out in the Lyot stop. Also, the support structure of the secondary mirror has been thickened, the secondary obscuration has been broadened, and the outer diameter of the pupil has been shrunk to accommodate a misalignment in translation of the apodizer of up to 0.5% of the diameter of the reimaged telescope pupil.

### 5.2. LUVOIR-A

As LUVOIR-A is a space telescope, we fix the design raw contrast at  $10^{-10}$ . The outer working angle was also fixed at  $30\lambda/D$ . For the Lyot mask we used a thickened version of the LUVOIR-A pupil, where segment gaps, spiders, and central obscuration were broadened and the outer diameter was shrunk by  $\sim 1.5\%$ . No attempt was made to optimize this percentage as a hyperparameter. We performed a small parameter study on the inner working angle, of which we present here only one of the solutions. This solution has an inner working angle of  $2.2\lambda/D$  and a focal-plane mask offset of  $f_{\text{edge}} = 1.8\lambda/D$ . We show the phase solution, PSF on the focal-plane mask, intensity at the Lyot stop, and post-coronagraphic PSF in Figure 9.


### 5.3. Performance

We show the throughput and contrast for both case studies in Figure 10. We see that the inner working angles for the two coronagraph designs is  $1.4\lambda/D$  for VLT/SPHERE and  $2.2\lambda/D$  for LUVOIR-A. At larger angular separations the throughput rises quickly, reaching 90% of its maximum throughput at  $4\lambda/D$  and  $4.2\lambda/D$  for the VLT/SPHERE and LUVOIR-A design, respectively.

The maximum throughputs are 66% and 78% for the VLT/SPHERE and LUVOIR-A designs, respectively. For the VLT/SPHERE design this maximum throughput is primarily limited by the Lyot mask. The throughput without a phase apodizer is  $\sim 69\%$ , and the addition of any phase pattern on top can only reduce the throughput from there on. The throughput for the LUVOIR-A design, however, is shared between the phase apodization and the Lyot stop: without the Lyot-stop the throughput is  $\sim 87\%$ .

We also show the throughput for novel APLC designs for the VLT/SPHERE instrument and LUVOIR-A telescope. The VLT/SPHERE APLC design is a preliminary solution for a possible future upgrade of VLT/SPHERE (courtesy Mamadou N'Diaye). The LUVOIR-A APLC design is a part of a coronagraph design study for the LUVOIR-A aperture (courtesy Rémi Soummer). Their design procedure for both is based on the hybrid shaped pupil/APLC designs by N'Diaye et al. (2016). The inner working angle and maximum throughput of the PAPLC and APLC designs are summarized in Table 1. Care must be taken when directly comparing throughput between APLC and PAPLC designs, due to their different fields of view. During survey mode, one needs to observe at several sky-rotation angles or roll angles to retrieve a complete image for the full field of view, effectively reducing the throughput by a factor corresponding to the number of observations. During characterization mode, however, field of view is irrelevant, and a direct comparison can be made. The PAPLC designs yield almost double or triple the maximum throughput, for the VLT/SPHERE and LUVOIR-A designs, respectively, mostly or completely neutralizing the disadvantage in field of view. Furthermore, it provides a significantly reduced inner working angle by  $1.0\lambda_0/D$  and  $1.5\lambda_0/D$  for the VLT/SPHERE and LUVOIR-A designs, respectively.

To test the coronagraph as a function of tip-tilt jitter of the on-axis source, we show slices of the normalized intensity at various values for tip-tilt errors in Figure 11. We assume a normal, isotropic distribution of the tip-tilt offset with a standard deviation of  $\sigma$ . For the VLT/SPHERE design a  $< 3 \times 10^{-6}$  contrast for angular separations  $> 2.1\lambda/D$  is still

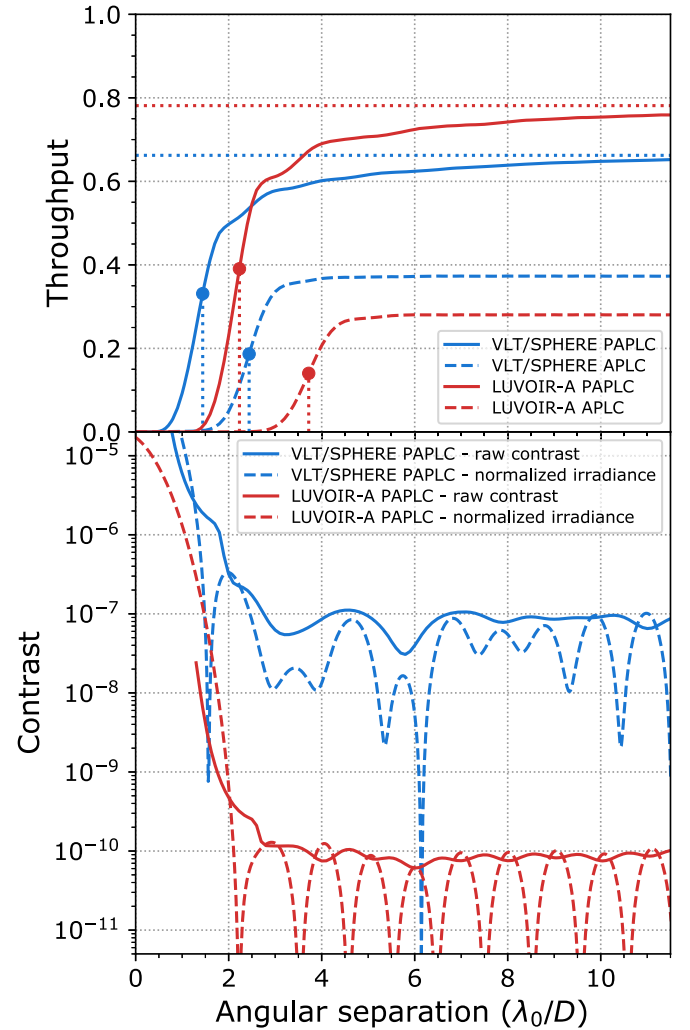


**Figure 10.** Throughput, raw contrast, and normalized irradiance for both the VLT/SPHERE and LUVOIR-A designs. Also shown are the throughput for APLC designs for each telescope. Note that the PAPLC has a smaller field of view compared to the APLC designs, which should be taken into account during survey mode but is irrelevant in characterization mode. The inner working angles and maximum throughput for each of the coronagraph designs are listed in Table 1.

**Table 1**  
The Inner Working Angle and Throughput for All Coronagraph Designs Shown in Figure 10

Quantity	VLT/SPHERE		LUVOIR-A	
	PAPLC	APLC	PAPLC	APLC
IWA	$1.4\lambda_0/D$	$2.4\lambda_0/D$	$2.2\lambda_0/D$	$3.7\lambda_0/D$
$T_{\text{max}}$	66%	38%	78%	28%

**Note.** Care must be taken when directly comparing maximum throughput between PAPLC and APLC designs, due to their different fields of view. A discussion of these quantities can be found in the text.

achieved with a tip-tilt rms of  $\sigma < 0.1\lambda/D$ . This tip-tilt performance is (almost) achieved with current high-contrast imagers from the ground at infrared wavelengths (Fusco et al. 2014; Escárte et al. 2018). For the LUVOIR-A design, a contrast of  $< 5 \times 10^{-9}$  for angular separations  $> 2.5\lambda/D$  is achieved at a tip-tilt rms of  $\sigma < 0.01\lambda/D$ . This tip-tilt sensitivity is significantly worse than the APLC for LUVOIR-A, and has to

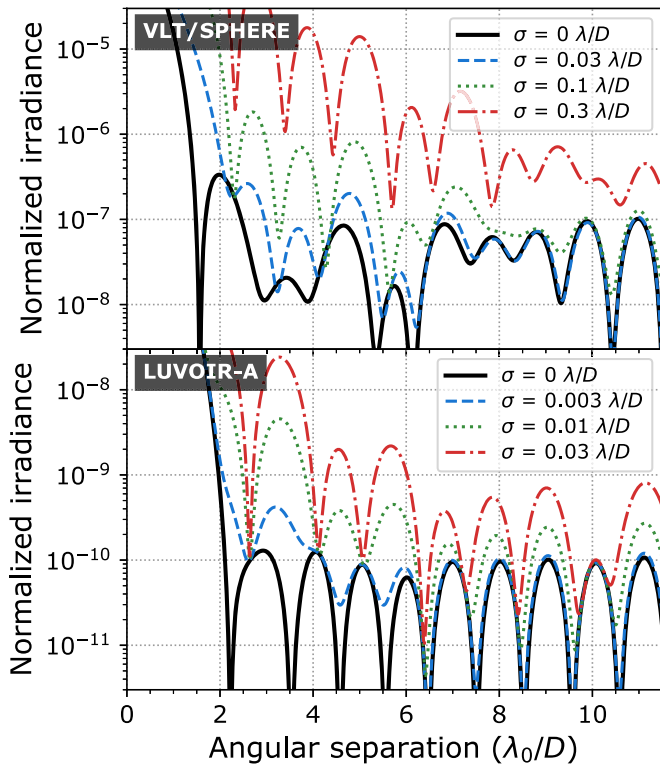

**Figure 11.** Slices of the normalized irradiance for varying values of the rms tip-tilt error on the star for both the VLT/SPHERE and LUVOIR-A design. The different rms values were chosen to show the transition from no effect to a significant effect on the normalized irradiance. A normal, isotropic distribution was assumed for tip-tilt.

be improved for the PAPLC to be considered a viable option for giant space telescopes.

Both designs presented in this section—in fact all designs presented in this work—are not made robust against aberrations or misalignment of the Lyot stop. As APLCs can be made robust to aberrations by including these aberrations in the optimization problem (N’Diaye et al. 2015), one can postulate that PAPLCs might be able to be made robust as well. The design of robust PAPLCs and an analysis of the corresponding hit in coronagraphic throughput is left for future work.

## 6. Conclusions

In this work we presented the PAPLC. This coronagraph uses a standard Lyot-style architecture and its design procedure is a mix between that for the APLC and the APP coronagraph. Starting from an aperture-photometric methodology, we derive a tractable optimization problem to obtain a globally optimal solution for the phase pattern in the PAPLC. This shows that an PAPLC will always perform equally or better an APLC by design, given a certain focal-plane mask and Lyot-stop, barring experimental or manufacturing errors.

We distinguished two cases for a PAPLC. The first uses a conventional annular focal-plane mask and produces point-symmetric dark zones. This case provides performance analogous to the APLC, showing similar structure in the apodizer design. Apodizers consist of regions of 0 or  $\pi$  radians in phase, rather than 0 or 1 in amplitude for the APLC.

The second case uses a knife-edge focal-plane mask and is optimized to produce a one-sided dark zone. This case yields apodizers similar to APPs, but uses the Lyot stop to gain in

contrast. These designs show inner working angles as close as  $1.4\lambda/D$  and can be made entirely achromatic. Additionally, the coronagraph can reach space-based contrasts ( $<10^{-10}$ ) at these inner working angles at a throughput of around 60%–80% for central obscurations up to 30%. Furthermore, as the knife-edge is invariant to translation along one axis, the coronagraph can handle tilt along that axis as well. We can use this to make the coronagraph invariant to residual atmospheric dispersion.

We presented two designs for realistic telescope pupils: one for VLT/SPHERE as an example of a ground-based telescope, and one for LUVOIR-A as an example of a space-based telescope. This shows that the PAPLC can deal with blocking dead deformable mirror actuators, secondary support structure, and the segmentation in these telescope pupils.

Future research will focus on testing PAPLC in a lab setting and finally on sky. Additionally, making the PAPLC robust against low-order aberrations is certainly intriguing from a design perspective. Another interesting avenue for future research is integrating the PAPLC with wavefront sensing. As the light from the bright side of the PSF is blocked by the focal plane mask, one can envision using a reflective focal-plane mask instead, and reimaging the bright side on a separate, fast detector. Adding a defocus to this reimaged PSF allows reconstruction of the phase of the incoming wavefront using phase diversity (Gonsalves 1982) or spatial linear dark field control (Miller et al. 2017).

I thank Matthew Kenworthy and Christoph Keller for their comments, which helped improve this work. I also thank Mamadou N’Diaye, Rémi Soummer, Alexis Carlotti, Rémi Flamary, Kathryn St. Laurent, and Jamie Noss for supplying the APLC designs for VLT/SPHERE and LUVOIR-A.

This research made use of HICIPy, an open-source object-oriented framework written in Python for performing end-to-end simulations of high-contrast imaging instruments (Por et al. 2018). Additionally, we used the numerical library NumPy (van der Walt et al. 2011) and visualizations were made using the library Matplotlib (Hunter 2007).

## Funding

E.H.P. acknowledges funding by The Netherlands Organisation for Scientific Research (NWO) and the São Paulo Research Foundation (FAPESP).

## Disclosures

The author declares that there are no conflicts of interest related to this article.

## Appendix

### Full Optimization Problem

Here we state the full optimization problem, as solved by the large-scale optimization software. This includes linearized constraints on the contrast, and a linearized version of the tip-tilt correction algorithm as presented in Section 2.4.

$$\underset{X(x), Y(x)}{\text{maximize}} \quad \Re\{E_{\text{noncoro}, \lambda_0}(0)\} \quad (13a)$$

$$\text{subject to} \quad X^2(x) + Y^2(x) \leq 1 \quad \forall x \quad (13b)$$

$$\begin{aligned} & \mathfrak{R}\{E_{\text{coro},\lambda}\} + \mathcal{J}\{E_{\text{coro},\lambda}\} \\ & \leq \sqrt{10^{-c(\mathbf{k})} S_{\text{expected}}} \quad \forall \mathbf{k} \in D \quad \forall \lambda \in [\lambda_-, \lambda_+] \end{aligned} \quad (13c)$$

$$\begin{aligned} & \mathfrak{R}\{E_{\text{coro},\lambda}\} - \mathcal{J}\{E_{\text{coro},\lambda}\} \\ & \leq \sqrt{10^{-c(\mathbf{k})} S_{\text{expected}}} \quad \forall \mathbf{k} \in D \quad \forall \lambda \in [\lambda_-, \lambda_+] \end{aligned} \quad (13d)$$

$$\begin{aligned} & -\mathfrak{R}\{E_{\text{coro},\lambda}\} + \mathcal{J}\{E_{\text{coro},\lambda}\} \\ & \leq \sqrt{10^{-c(\mathbf{k})} S_{\text{expected}}} \quad \forall \mathbf{k} \in D \quad \forall \lambda \in [\lambda_-, \lambda_+] \end{aligned} \quad (13e)$$

$$\begin{aligned} & -\mathfrak{R}\{E_{\text{coro},\lambda}\} - \mathcal{J}\{E_{\text{coro},\lambda}\} \\ & \leq \sqrt{10^{-c(\mathbf{k})} S_{\text{expected}}} \quad \forall \mathbf{k} \in D \quad \forall \lambda \in [\lambda_-, \lambda_+] \end{aligned} \quad (13f)$$

$$\mathfrak{R}\{E_{\text{noncoro},\lambda_0}(\mathbf{k})\} \leq \mathfrak{R}\{E_{\text{noncoro},\lambda_0}(0)\} \quad \forall \mathbf{k} \quad (13g)$$

$$-\mathfrak{R}\{E_{\text{noncoro},\lambda_0}(\mathbf{k})\} \leq -\mathfrak{R}\{E_{\text{noncoro},\lambda_0}(0)\} \quad \forall \mathbf{k} \quad (13h)$$

$$\mathcal{J}\{E_{\text{noncoro},\lambda_0}(\mathbf{k})\} \leq \mathfrak{R}\{E_{\text{noncoro},\lambda_0}(0)\} \quad \forall \mathbf{k} \quad (13i)$$

$$-\mathcal{J}\{E_{\text{noncoro},\lambda_0}(\mathbf{k})\} \leq \mathfrak{R}\{E_{\text{noncoro},\lambda_0}(0)\} \quad \forall \mathbf{k}. \quad (13j)$$

Here  $S_{\text{expected}}$  is the expected transmission of the coronagraphic design. After optimization, this expected Strehl ratio can be updated by

$$S_{\text{expected}} = (\mathfrak{R}\{E_{\text{noncoro},\lambda_0}(0)\})^2. \quad (14)$$

The above optimization problem is then restarted with the updated expected Strehl ratio. This process is repeated until the expected Strehl ratio converges.

### ORCID iDs

Emiel H. Por  <https://orcid.org/0000-0002-3961-083X>

### References

- Beuzit, J.-L., Vigan, A., Mouillet, D., et al. 2019, *A&A*, **631**, A155  
 Borucki, W. J., Koch, D. G., Basri, G., et al. 2011, *ApJ*, **736**, 19  
 Carlotti, A., Vanderbei, R., & Kasdin, N. J. 2011, *OExpr*, **19**, 26796  
 Charbonneau, D., Brown, T. M., Latham, D. W., & Mayor, M. 2000, *ApJL*, **529**, L45  
 Close, L. M., Males, J. R., Kopon, D. A., et al. 2012, *Proc. SPIE*, **8447**, 84470X  
 Codona, J., Kenworthy, M., Hinz, P., Angel, J., & Woolf, N. 2006, *Proc. SPIE*, **6269**, 62691N  
 Currie, T., Kasdin, N. J., Groff, T. D., et al. 2018, *PASP*, **130**, 044505  
 Doelman, D. S., Snik, F., Warriner, N. Z., & Escuti, M. J. 2017, *Proc. SPIE*, **10400**, 104000U  
 Escárte, P., Christou, J. C., Rahmer, G., et al. 2018, *Proc. SPIE*, **10703**, 107034F  
 Fogarty, K., Mazoyer, J., Laurent, K. S., et al. 2018, *Proc. SPIE*, **10698**, 106981J  
 Fusco, T., Sauvage, J.-F., Petit, C., et al. 2014, *Proc. SPIE*, **9148**, 91481U  
 Gonsalves, R. A. 1982, *OptEn*, **21**, 829  
 Guerri, G., Daban, J.-B., Robbe-Dubois, S., et al. 2011, *ExA*, **30**, 59  
 Gurobi Optimization, I. 2016, Gurobi Optimizer Reference Manual (Gurobi Optimization, Inc.), <http://www.gurobi.com>  
 Henry, G. W., Marcy, G. W., Butler, R. P., & Vogt, S. S. 2000, *ApJL*, **529**, L41  
 Hunter, J. D. 2007, *CSE*, **9**, 90  
 Jovanovic, N., Martinache, F., Guyon, O., et al. 2015, *PASP*, **127**, 890  
 Kasdin, N. J., Vanderbei, R. J., Spergel, D. N., & Littman, M. G. 2003, *ApJ*, **582**, 1147  
 Kushner, H. J. 1964, *Journal of Basic Engineering*, **86**, 97  
 Macintosh, B. A., Graham, J. R., Palmer, D. W., et al. 2008, *Proc. SPIE*, **7015**, 701518  
 Males, J. R., Close, L. M., Morzinski, K. M., et al. 2014, *ApJ*, **786**, 32  
 Mayor, M., & Queloz, D. 1995, *Natur*, **378**, 355  
 Mennesson, B., Gaudi, S., Seager, S., et al. 2016, *Proc. SPIE*, **9904**, 9904  
 Miller, K., Guyon, O., & Males, J. 2017, *JATIS*, **3**, 049002  
 N'Diaye, M., Pueyo, L., & Soummer, R. 2015, *ApJ*, **799**, 225  
 N'Diaye, M., Soummer, R., Pueyo, L., et al. 2016, *ApJ*, **818**, 163  
 Otten, G. P., Snik, F., Kenworthy, M. A., et al. 2017, *ApJ*, **834**, 175  
 Pathak, P., Guyon, O., Jovanovic, N., et al. 2016, *PASP*, **128**, 124404  
 Por, E. H. 2017, *Proc. SPIE*, **10400**, 104000V  
 Por, E. H., Haffert, S. Y., Radhakrishnan, V. M., et al. 2018, *Proc. SPIE*, **10703**, 107034Z  
 Pueyo, L., Zimmerman, N., Bolcar, M., et al. 2017, *Proc. SPIE*, **10398**, 103980F  
 Riggs, A. E., Zimmerman, N. T., Nemati, B., & Krist, J. 2017, *Proc. SPIE*, **10400**, 104000O  
 Ruane, G., Riggs, A., Mazoyer, J., et al. 2018, *Proc. SPIE*, **10698**, 106982S  
 Slepian, D. 1965, *JOSA*, **55**, 1110  
 Snik, F., Otten, G., Kenworthy, M., et al. 2012, *Proc. SPIE*, **8450**, 84500M  
 Snoek, J., Larochelle, H., & Adams, R. P. 2012, *Advances in Neural Information Processing Systems* (Red Hook, NY: Curran Associates), 2951  
 Soummer, R. 2004, *ApJL*, **618**, L161  
 Spergel, D., Gehrels, N., Breckinridge, J., et al. 2013, arXiv:1305.5422  
 van der Walt, S., Colbert, S. C., & Varoquaux, G. 2011, *CSE*, **13**, 22  
 Waterhouse, W. C. 1983, *The American Mathematical Monthly*, **90**, 378  
 Zimmerman, N. T., Eldorado Riggs, A. J., Jeremy Kasdin, N., Carlotti, A., & Vanderbei, R. J. 2016, *JATIS*, **2**, 011012